




Tennant 's A 60 is a robust and user-friendly outdoor sweeper. It boasts an outstanding ergonomic design, excellent sweeping performance and low operating cost.

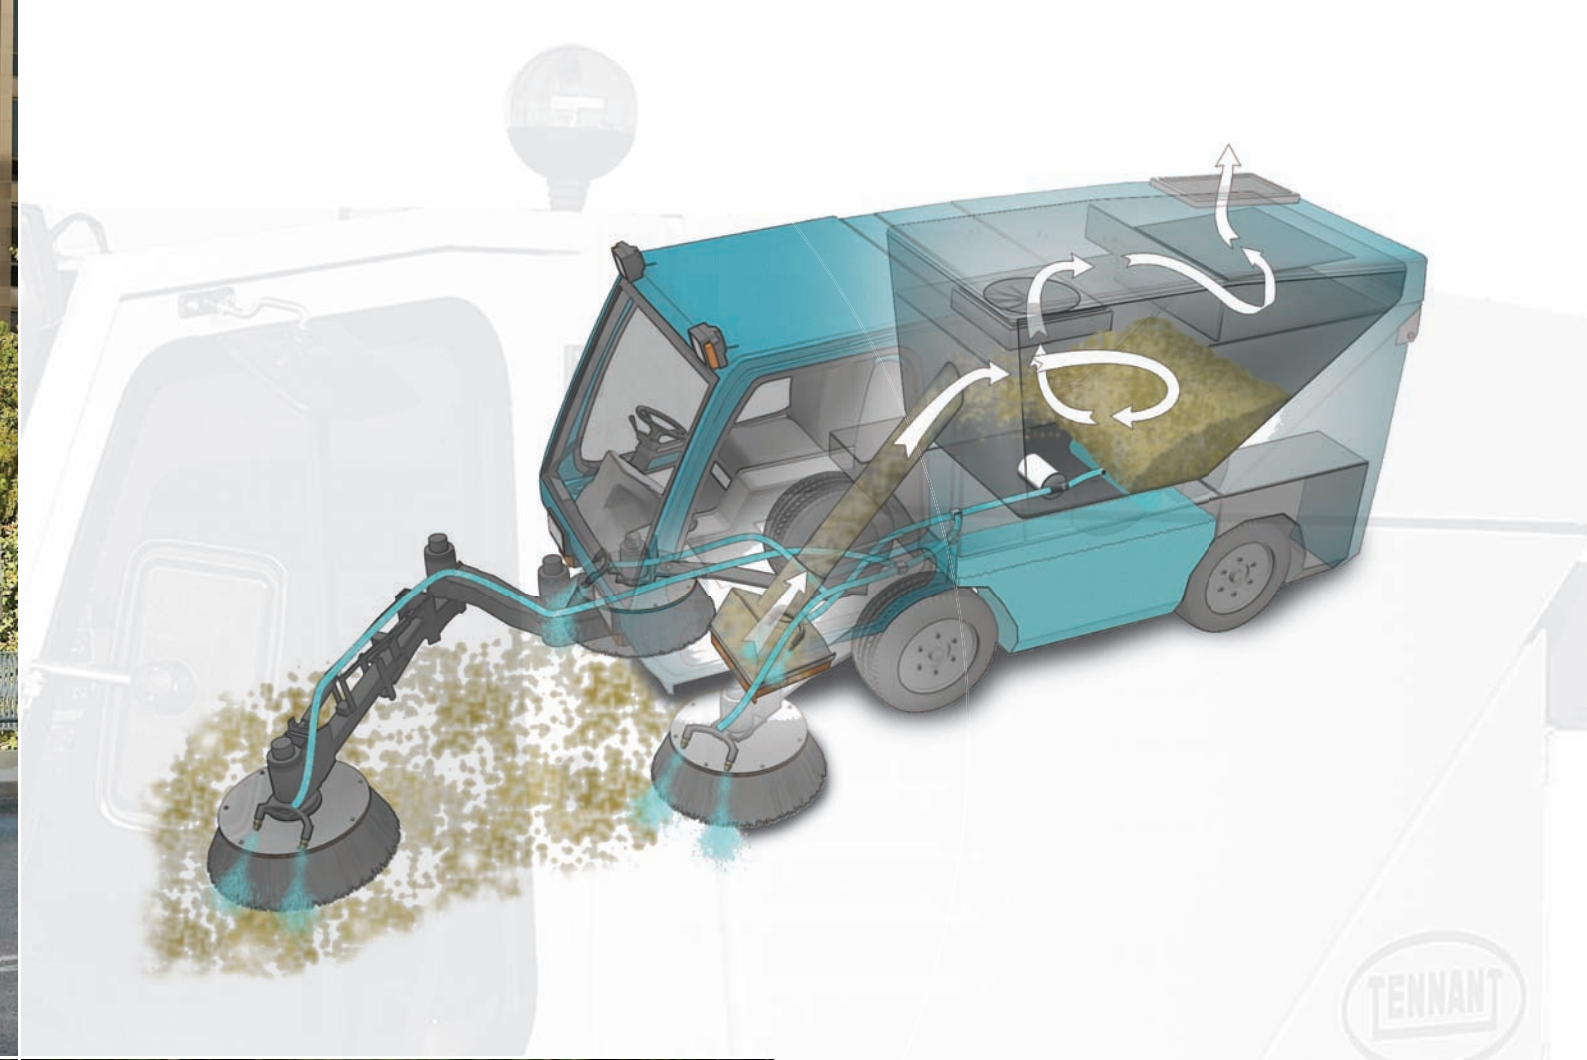

Performance

- Low noise level
- Simplicity of (daily) maintenance
- Machine reliability
- Large load capacity
- Low fuel consumption
- Great machine - small dimensions



Ergonomics

- Huge window area
- Fully adjustable suspended seat
- Easy access to the front of the sweeper
- Joystick for a complete control of the third brush (option)
- Neutral sitting position
- Vibration isolated cabin
- Sound proof cabin



A60 Specifications

CITY CLEANING AIR SWEEPER

DIMENSIONS:

Length:	3850 mm
Width:	1300 mm
Height:	1990 mm
Wheel base:	1700 mm
Rear overhang:	700 mm
Track front axle:	1100 mm
Track rear axle:	1100 mm

WEIGHT:

Net weight:	2600 Kg
Net weight on front axle:	1300 Kg
Net weight on rear axle:	1500 Kg
Payload:	2100 Kg
Gross vehicle weight:	4700 Kg

MEASURES OF CAPACITY:

Refuse hopper:	1700 L
Water tanks:	430 L
Fuel tank:	60 L
Hydr. oil tank:	70 L

DIESEL ENGINE:

Daimler/Detroit VM	EURO 5
Model:	R754EU5
Cylinders:	4
Displacement:	2972 cc
Power:	70 KW at 2300 RPM
Peak torque:	340 Nm at 1350 RPM

POWER STEERING:

Fully hydraulic on front axle
Danfoss orbital system, 2 hydraulic steering cylinders
Max. wheel angle: 60 degrees
Turning radius: 2750 mm
Turning radius between walls: 3650 mm

SUCTION SYSTEM AND BLOWER:

Hydraulically driven suction fan. Roof mounted.
Diameter 600 mm
Hydraulic motor: Volvo (direct driven on the fan)
Engine rpm in sweeping mode: 1200 – 1700 rpm

SWEEPING UNIT:

Two brushes 900 mm mounted in front of front axle.
Suction nozzle: width 720 mm (stainless steel)
Sweeping path standard: between 1400 and 2100 mm
Sweeping path with 3rd brush: max. 2650 mm
Sweeping reach with 3rd brush: 3300 mm
Both brushes can be shifted in and out over a distance of 300 mm
Brush rpm: variable between 0 – 150 rpm.
Diameter: 200 mm (Linatex lining).
Hydraulic functions (in cab controlled):
Up/down suction nozzle
Up/down brushes
Pressure adjustment brushes
Left/right shift brushes independent
Opening/closing nozzle flap
Total Third brush control (optional)

HOPPER:

Completely made out of stainless steel (incl. fan housing)
Capacity: 1700 Liters
Hydraulic tipping system (with 2 hydr. Cylinders)
Rear-door (opening) and hopper-tipping by means of remote control.
Tipping angle: 80 degrees.
Discharge height: 1400 mm



Tennant Company offers the most complete line of floor and surface maintenance equipment & solutions, brushes and cleaning detergents in the world. Our sales and service network provides you with integrated custom-made cleaning solutions (including rental and leasing programs) to meet any floor care need. Our service offering consists of several preventive maintenance programs, all with the same goal; maximum cleaning performance, minimal cleaning costs per square meter and maximised machine uptime.

TENNANT EUROPE NV

Plantin & Moretuslei 220 • 2018 Antwerp • BELGIUM
Tel: +32 3 217 94 11 • Fax: +32 3 217 94 19
E-mail: info@tennant.be • www.tennant.be • www.tennantco.com

TENNANT UK LTD.

Gladstone Road • Northampton NN5 7RX • UNITED KINGDOM
Tel: 00800-2255 8366 • Fax: 00800-3298 3662
Tel: 01604 583191(local rate UK only) • Fax: 01604 587909(local rate UK only)
E-mail: europe@tennantco.com • www.tennantco.com

TENNANT CEE GmbH

Sommerfeld 1 • 5202 Neumarkt am Wallersee • AUSTRIA
Tel: +43 (0)6216 4524 & 4525 • Fax: +43 (0)6216 4524 20
E-mail: office@tennant-cee.com • www.tennantco.com

A60

City Cleaning

